

## SEATBELT COMFORT CLIP

### Assembly Instructions

#### TOOLS NEEDED

1x Small Flathead Screw Driver



#### **WARNING**

Adding too much slack to the seatbelt will reduce its crash effectiveness and can result in serious bodily injury or even death.

Proposition 65, also known as the Safe Drinking Water and Toxic Enforcement Act of 1989 (“Prop 65”), requires manufacturers, distributors and sellers to provide a “clear and reasonable” warning before knowingly and intentionally exposing anyone in California to a chemical listed by the California Office of Environmental Health Hazard Assessment (“OEHHA”) as known to cause cancer, birth defects or other reproductive harm.


RECARO understands that you may sell finished products that contain RECARO’s products to consumers and/or businesses in California. In satisfaction of its obligations under Proposition 65, RECARO is providing this notice to inform you that some of its products (depending on the trim and seat configuration) may contain the following Prop 65 listed chemicals.

For more information: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

#### INSTRUCTIONS


**STEP 1:** Remove the Comfort Clip Top Unit from the housing unit. Insert the top of a small flathead screwdriver between the Top Unit and the Housing Unit. Gently pry the Top Unit away from the Housing Unit. You may hear a small click as the Top Unit pops out of, or into the Slide Channel. (figure 1).

**FIGURE 1**

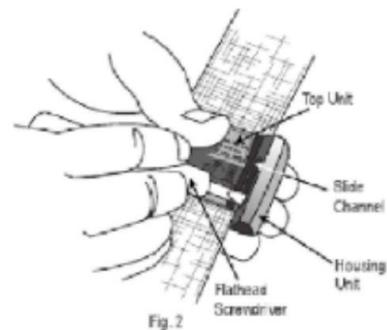

**STEP 2:** Place the Comfort Clip Housing Unit behind the seatbelt webbing. (figure 2).

**FIGURE 2**

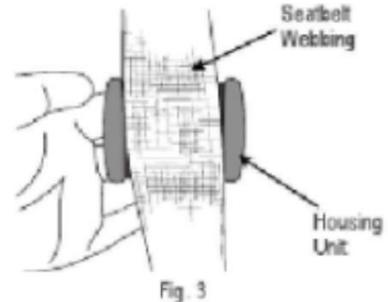

**STEP 3:** On the top of the Housing Unit, insert the small tab on the Top Unit into the slide channel on the Housing Unit.


**IMPORTANT!** Make sure the arrow the Top Unit is pointing down. The Comfort Clip will not work properly if it is not pointed in the correct direction.

**STEP 4:** Insert the tip of the small flathead screwdriver between the edge of the Top Unit and the Housing Unit.

**STEP 5:** Press down while gently prying the Housing Unit away from the Top Unit. You may hear a small click as the Top Unit tab pops into Slide Channel. Do NOT force the Top Unit into place. This may damage the Housing Unit.

**STEP 6:** To adjust the position of the Comfort Clip, buckle the seatbelt and slide the Top Unit upward on the Housing Unit. With the Top Unit in the UP position, pull out enough seatbelt webbing to insert ONLY two fingers between the chest and seatbelt. Slide the Comfort Clip to the top of the seatbelt. (figure 3).

**FIGURE 3**

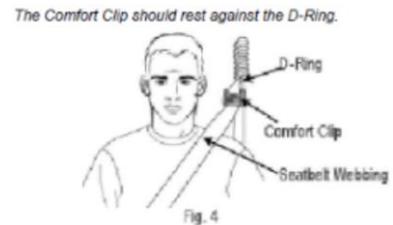

**STEP 7:** To lock the Comfort Clip into place, slide the Top Unit down. The Comfort Clip will move along the Slide Channel and tighten on the seatbelt.

Part numbers: 5314873